Assured Connectivity with Security &

Productivity for Small & Remote Offices

Cyberoam

Unified Threat Management


Gartner positions Cyberoam UTM as a "Visionary" in Magic Quadrant for SMB Multifunction Firewalls

Cyberoam CR 35ia Cyberoam CR 35ia Cyberoam CR 35ia Control of the control of

Cyberoam Unified Threat Management appliances offer assured security, connectivity and productivity to Small Office-Home Office (SOHO) and Remote Office-Branch Office (ROBO) users by allowing user identity-based policy controls.

Cyberoam's User Layer 8 Technology treats user-identity as the 8th Layer or the HUMAN layer in the protocol stack. It attaches user identity to security, taking organizations a step ahead of conventional solutions that bind security to IP-addresses. This adds speed to an organization's security by offering instant visibility into the source of attacks by username rather than IP address – allowing immediate remediation to restore security or allowing proactive security. Layer 8 technology functions along with each of Cyberoam security features to allow creation of identity-based security policies.

Cyberoam's future-ready Extensible Security Architecture (ESA) offers an extensible platform that can grow with the future security needs of an organization without degrading system performance. ESA supports feature enhancements that can be developed rapidly and deployed with minimum efforts.

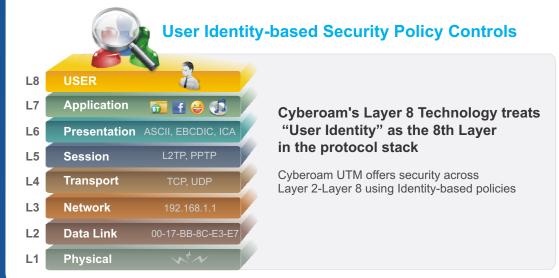

Cyberoam UTM features assure Security, Connectivity, Productivity



Network Security

- Firewall
- Intrusion Prevention System
- Wireless security

Content Security

- Anti-Virus/Anti-Spyware
- Anti-Spam
- HTTPS/SSL Content Security

Administrative Security

- Next-Gen UI
- iView- Logging & Reporting

Connectivity

- Business Continuity
- Multiple Link Management

Cyberoam CR35ia

- High Availability

Network Availability

- VPN - 3G/WiMAX Connectivity
- Future-ready Connectivity - "IPv6 Ready" Gold Logo

Productivity

Employee Productivity

- Content Filtering
- Instant Messaging Archiving & Controls

IT Resource Optimization

- Bandwidth Management
- Traffic Discovery
- Application Layer 7 Management

Administrator Productivity

- Next-Gen UI

Specification

Interfaces

Copper GbE Ports Configurable Internal/DMZ/WAN Ports Console Ports (RJ45/DB9) USB Ports Porformanco^{*}

System Ferrormance
Firewall throughput (UDP) (Mbps)
Firewall throughput (TCP) (Mbps)
New sessions/second
Concurrent sessions
168-bit 3DES/AES throughput (Mbps)
Anti-Virus throughput (Mbps)
IPS throughput (Mbps)
UTM throughput (Mbps)

Stateful Inspection Firewall

- -Layer 8 (User Identity) Firewall -Multiple Security Zones Access Control Criteria (ACC) User Identity, Source & Destination Zone, MAC and IP address, Service
- UTM policies IPS, Web Filtering, Application Filtering, Anti-Virus, Anti-Spam and Bandwidth Management

- Layer 7 (Application) Control & Visibility
 Access Scheduling
 Policy based Source & Destination NAT
 H.323, SIP NAT Traversal
- 802.1q VLAN Support DoS & DDoS Attack prevention
- MAC & IP-MAC filtering and Spoof prevention

- Gateway Anti-Virus & Anti-Spyware Virus, Worm, Trojan Detection & Removal Spyware, Malware, Phishing protection Automatic virus signature database update Scans HTTP, HTTPS, FTP, SMTP, POP3, IMAP, IM, VPN Turpade Tunnels
- Customize individual user scanning Self Service Quarantine area
- Scan and deliver by file size Block by file types
- -Add disclaimer/signature

- Gateway Anti-Spam Real-time Blacklist (RBL), MIME header check Filter based on message header, size, sender, recipient Subject line tagging

- Subject line tagging IP address Black list/White list Redirect Spam mails to dedicated email address Image-based Spam filtering using RPD Technology Zero hour Virus Outbreak Protection

- Self Service Quarantine area Spam Notification through Digest
- IP Reputation-based Spam filtering

Intrusion Prevention System - Signatures: Default (3000+), Custom - IPS Policies: Multiple, Custom - User-based policy creation

- -Automatic real-time updates from CRProtect networks Protocol Anomaly Detection
- DDoS attack prevention

- Web Filtering Inbuilt Web Category Database URL, keyword, File type block Categories: Default(82+), Custom Protocols supported: HTTP, HTTPS Block Malware, Phishing, Pharming URLs Schedule-based access control Custom block messages per category Block Java Applets, Cookles, Active X CIPA Compliant

- CIPA Compliant
 Data leakage control via HTTP, HTTPS upload

- Application Filtering Inbuilt Application Category Database Application Categories: e.g. Gaming, IM, P2P, Categories: e.g. Gaming, IM, P2P,
- Proxy : 11+
- Schedule-based access control
- Block P2P applications e.g. Skype
 - -Anonymous proxies e.g. Ultra surf "Phone home" activities

Toll Free Numbers

- Keylogger - Layer 7 (Applications) & Layer 8 (User - Identity) Visibility

Web Application Firewall^{##}

 Web Application Firewall"

 Positive Protection model

 - Unique "Intuitive Website Flow Detector" technology

 Protection against SQL Injections, Cross-site Scripting (XSS), Session Hijacking, URL Tampering, Cookie Poisoning

 - Support for HTTP 0.9/1.0/1.1

 - Extensive Logging & Reporting

USA: +1-800-686-2360 | India: 1-800-301-00013 APAC/MEA: +1-877-777-0368 | Europe: +44-808-120-3958

www.cyberoam.com | sales@cyberoam.com

Virtual Private Network

- Diffie Hellman Groups - 1,2,5,14,15,16 - External Certificate Authority support

- VPN connection redundancy - Overlapping Network support

- Hub & Spoke VPN support

SSL VPN

TELNET, SSH

- Virus Scanning for IM traffic - Allow/Block Login - Allow/Block Kile Transfer - Allow/Block Webcam

- IM activities Log - Archive files transferred

- Custom Alerts

Management

Forwarding

High Availability

Stateful failover

- NTP Support

-Allow/Block one-to-one/group chat - Content-based blocking

Wireless WAN - USB port 3G and Wimax Support[#] - Primary WAN link - WAN Backup link

-Access time restriction - Time and Data Quota restriction

Parent Proxy support with FQDN
 "IPv6 Ready" Gold Logo

-Alerts on appliance status change

- Web-based configuration wizard - Role-based access control

- Firmware Upgrades via Web UI - Web 2.0 compliant UI (HTTPS)

-Active-Active -Active-Passive with State Synchronization

Administration & System Management

- UI Color Styler - Command Line Interface (Serial, SSH, Telnet)

*Antivirus, IPS and UTM performance is measured based on HTTP traffic as per RFC 3511 guidelines. Actual performance may vary depending on the real network traffic environments.

**Additional Purchase Required. "3G card and modem details are not included. See http://www.cyberoam.com for supported USB devices." Subscription available in all the Models of CR50ia & above.

Copyright© 1999-2013 Cyberoam Technologies Pvt.Ltd. All Rights Reserved. Cyberoam and Cyberoam logo are registered trademark of Cyberoam Stechnologies Pvt. Ltd. Althoug Cyberoam has attempted to provide accurate information. Cyberoam assures no responsibility for accuracy completeness of information neither is this a legally binding representation. Cyberoam has the right H change.mddft, transfer cordnewise revises the publication without notice. AMV-16-1000225-100422

- SMMP (v1, v2c, v3) - Multi-lingual support: Chinese, Hindi, French, Korean - Cyberoam Central Console (Optional)

Bandwidth Management - Application and User Identity based Bandwidth

- Guaranteed & Burstable bandwidth policy - Application & User Identity based Traffic Discovery - Multi WAN bandwidth reporting - Category-based bandwidth restriction

User Identity and Group Based Controls

Export Road Warrior connection configuration
 Domain name support for tunnel end points

Yes

750 500

5,500 175.000 50/80

125 150

90

- -IPSec, L2TP, PPTP
 Encryption 3DES, DES, AES, Twofish, Blowfish, Serpent
 Hash Algorithms MD5, SHA-1
 Authentication Preshared key, Digital certificates

-Authentication - Active Directory, LDAP, RADIUS, Cyberoam - Multi-layered Client Authentication - Certificate,

- Multi-layered Client Authentication - Certificate, Username/Password
 - User & Group policy enforcement
 - Network access - Split and Full tunneling
 Browser-based (Portal) Access - Clientless access
 - Lightweight SSL VPN Tunneling Client
 - Granular access control to all the Enterprise Network
 reconverse

resources Administrative controls - Session timeout, Dead Peer

Detection, Portal customization TCP- based Application Access - HTTP, HTTPS, RDP,

Instant Messaging (IM) Management - Yahoo and Windows Live Messenger

- IPSec NAT Traversal
 Dead peer detection and PFS support
- -Active Directory Integration -Automatic Windows Single Sign On External LDAP/RADIUS database integration
 - Thin Client support Microsoft Windows Server 2003 Terminal Services and Citrix XenApp

User Authentication

Internal database

- RSA securID support External Authentication Users and Administrators
- User/MAC Binding Multiple Authentication servers

- Logging/Monitoring Graphical real-time and historical monitoring Email notification of reports, viruses and attacks
- Syslog support Log Viewer IPS, Web filter, Anti Virus, Anti Spam, Authentication, System and Admin Events

On-Appliance Cyberoam-iView Reporting - Integrated Web-based Reporting tool -Cyberoam-iView - 1000+ drilldown reports

- 45+ Compliance Reports Historical and Real-time reports
- Multiple Dashboards Username, Host, Email ID specific Monitoring Dashboard Reports - Security, Virus, Spam, Traffic, Policy violations, VPN, Search Engine keywords
- Multi-format reports tabular, graphical Exportable formats PDF, Excel
- -Automated Report Scheduling

IPSec VPN Client**

- Inter-operability with major IPSec VPN Gateways Supported platforms: Windows 2000, WinXP 32/64-bit, Windows 2003 32-bit, Windows 2008 32/64-bit, Windows Vista 32/64-bit, Windows 7 RC1 32/64-bit - Import Connection configuration

Certification

- ICSA Firewall Corporate Checkmark UTM Level 5 Certification
- VPNC Basic and AES interoperability "IPv6 Ready" Gold Logo

Compliance CE FCC

Dimensions H x W x D (inches) 1.7 x 6 x 9.1 4.4 x 15.3 x 23.2 HxWxD(cms) Weight

Power Input Voltage Consumption Total Heat Dissipation (BTU)

2.3 kg, 5.07 lbs 100-240 VAC

Environmental Operating Temperature Storage Temperature Relative Humidity (Non condensing)

5 to 40 °C 0 to 70 °C 10 to 90%

beroam

Unified Threat Management

47.8W

163

Networking - Failover - Automated Failover/Failback, Multi-WAN failover, 3GModem failover WRR based load balancing

- WKR Dased load Dalancing - Policy routing based on Application and User - IP Address Assignment - Static, PPPoE, L2TP, PPTP & DDNS Client, Proxy ARP, DHCP server, DHCP relay - Support for HTTP Proxy - Dynamic Routing: RIP v1& v2, OSPF, BGP, Multicast

- Schedule based Committed and Burstable Bandwidth - Schedule based P2P and IM Controls